
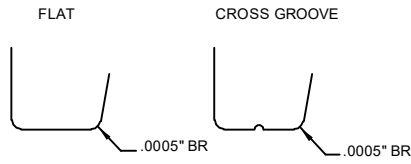


# SERIES KNH

FOR AUTOMATIC BONDERS

Double Flat ,Vertical Feed for Hughes, Palomar, Hesse & Knipps and F&K Delvotec Bonders

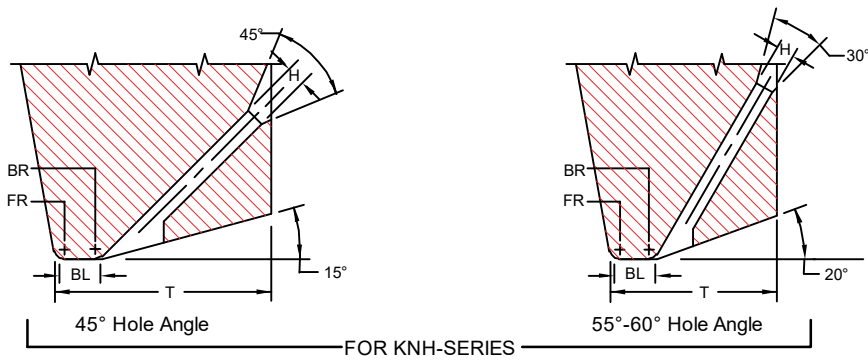


We recommend a .0005" back radius and a cross groove or a flat bond foot when ordering tools for gold wire thermosonic bonding. For more gold wire application information see **Tech Tips**

## KNH-SERIES


WIRE Ø .0005" through .0020

## S1 Option

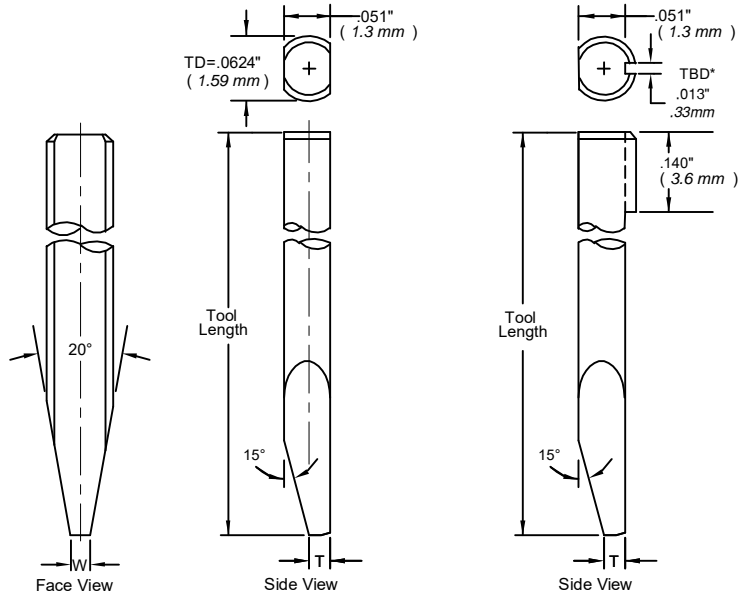

\*To be determined according to ribbon size

Standard: Ø 1/16, Hole Angle: 45°, 55°, 60°

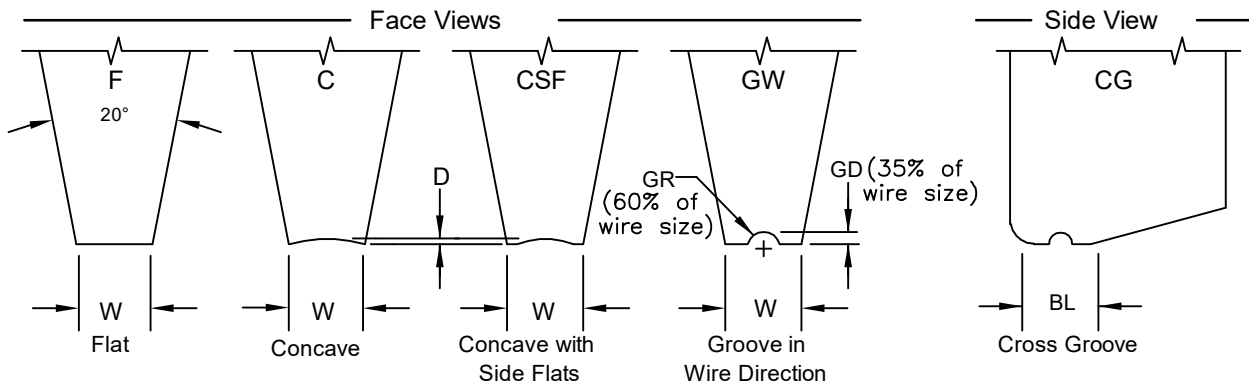

# SERIES KNH

## SMALL WIRE

### ORDERING INFORMATION

#### SMALL WIRE BONDING WEDGES

#### FOR GOLD AND ALUMINUM WIRE

**SAMPLE PART NUMBER:** M-KNH-D-1/16-3/4-45-CG-2020-M-\*

**SYMBOL EXPLANATION:** 1 2 3 4 5 6 7 8 9 10

1. **MATERIAL:** \_\_\_\_\_  
 M = Ceramic  
 C = Tungsten Carbide  
 T = Titanium  
 All other: See Material Selection Guide
  2. **SERIES:** KNH \_\_\_\_\_
  3. **FRONT/BACK RADIUS:** See Radius Option Chart \_\_\_\_\_  
 \*For special Radius sizes insert an X Please specify FR/BR
  4. **SHANK DIA.:** Please Specify Diameter \_\_\_\_\_
  5. **TOOL LENGTH:** Please Specify Length \_\_\_\_\_
  6. **HOLE ANGLE:** 45°,55°,60 \_\_\_\_\_
- (10) S1 and other Option See Tool Options
- (9) **FOOT FINISH:**  
**M** = Matte finish (FR, BR, & Bond Flat)  
**P** = Polish finish (FR, BR, & Bond Flat)  
**MP** = Polish finish (FR, BR), and Matte finish (Bond Flat)
- (8) **TOOL SIZE:** See Standard Chart
- (7) **FOOT TYPE:** **F** = Flat  
**C** = Concave  
**CSF** = Concave with Side Flats (CSF not available with ceramic tools)  
**CG** = Cross Groove  
**GW** = Groove in wire direction (Please specify wire size)

For special sizes or dimensions insert an (X) in the appropriate position of the part number then specify what (X) equals.

Example: M-KNH-X-1/16-3/4-45-F-2020-M (X) FR=.0012, BR=.0007

RADIUS OPTION CHART	OPTION LETTER		A	B	C	D	E	F	G	H	I	J	K	L	M	N
	FRONT RADIUS	in.	.0005	.0005	.0010	.0010	.0010	.0015	.0015	.0015	.0015	.0020	.0020	.0020	.0020	.0020
		μ	13	13	25	25	25	38	38	38	38	51	51	51	51	51
	BACK RADIUS	in.	0	.0005	0	.0005	.0010	0	.0005	.0010	.0015	0	.0005	.0010	.0015	.0020
	μ	0	13	0	13	25	0	13	25	38	0	13	25	38	51	

STANDARD CHART																KNH SMALL WIRE:				FOR WIRE DIAMETERS .0005" THROUGH .0020"			
TS	H		BL		D		T 45°		T(55° 60°)		W		SUGGESTED WD										
Units	in.	μ	in.	μ	in.	μ	in.	μ	in.	μ	in.	μ	in.	μ	in.	μ							
Tolerance	±.0002	±5	±.0002	±5	-.0001	-2.5	±.0005	±13	±.0005	±13	±.0005	±13	±.0005	±5									
1505	.0015	38	.0005	13	.0002	5	.0085	216	.0075	191	.0025	64											
1507	.0015	38	.0007	18	.0002	5	.0085	216	.0075	191	.0025	64	.0005	13									
1510	.0015	38	.0010	25	.0002	5	.0090	229	.0080	203	.0025	64	through	18									
1513	.0015	38	.0013	33	.0002	5	.0090	229	.0080	203	.0025	64											
1515	.0015	38	.0015	38	.0002	5	.0090	229	.0080	203	.0025	64											
1520	.0015	38	.0020	51	.0002	5	.0100	254	.0090	229	.0025	64											
Tolerance	±.0002	±5	±.0002	±5	-.0001	-2.5	±.0005	±13	±.0005	±13	±.0002	±5											
2010	.0020	51	.0010	25	.0002	5	.0100	254	.0090	229	*.0040	102											
2015	.0020	51	.0015	38	.0002	5	.0100	254	.0090	229	.0040	102	.0007	18									
2020	.0020	51	.0020	51	.0002	5	.0110	279	.0090	229	.0040	102	through	25									
2025	.0020	51	.0025	64	.0002	5	.0110	279	.0100	254	.0040	102											
2030	.0020	51	.0030	76	.0002	5	.0120	305	.0100	254	.0040	102											
2520	.0025	64	.0020	51	.0002	5	.0120	305	.0100	254	.0040	102											
2525	.0025	64	.0025	64	.0002	5	.0120	305	.0110	279	.0040	102											
2530	.0025	64	.0030	76	.0002	5	.0130	330	.0110	279	.0050	127	.0013	33									
2535	.0025	64	.0035	89	.0002	5	.0130	330	.0110	279	.0050	127											
2540	.0025	64	.0040	102	.0002	5	.0140	356	.0120	305	.0050	127											
3020	.0030	76	.0020	51	.0003	8	.0130	330	.0110	279	.0050	127											
3025	.0030	76	.0025	64	.0003	8	.0130	330	.0120	305	.0050	127											
3030	.0030	76	.0030	76	.0003	8	.0140	356	.0120	305	.0050	127	.0015	38									
3035	.0030	76	.0035	89	.0003	8	.0140	356	.0130	330	.0050	127											
3040	.0030	76	.0040	102	.0003	8	.0150	381	.0130	330	.0050	127											
3525	.0035	89	.0025	64	.0003	8	.0150	381	.0120	305	.0060	152											
3530	.0035	89	.0030	76	.0003	8	.0150	381	.0130	330	.0060	152											
3535	.0035	89	.0035	89	.0003	8	.0160	406	.0130	330	.0060	152	.0020	51									
3540	.0035	89	.0040	102	.0003	8	.0160	406	.0140	356	.0060	152											
3545	.0035	89	.0045	114	.0003	8	.0170	432	.0140	356	.0060	152											
3550	.0035	89	.0050	127	.0003	8	.0170	432	.0150	381	.0060	152											

\*Other sizes available upon request \*All dimensions and tolerances are for reference only  
 TOOL SIZE=TS, WIRE DIAMETER=WD "T" To be determined according to the size of FR and BR and Hole Bore Length